

Enhanced Community Structure Detection in Social Networks

Zhong-Yuan Zhang, Kai-Di Sun, Si-Qi Wang^a

^a*School of Statistics, Central University of Finance and Economics,
P.R.China*

Abstract

Community structure detection in complex social networks has become a hot research topic since it can help better understand the network topology, such as revealing the functional modules in the network, and how the network works. However, there is still not a clear and widely-accepted definition of community structures, and most of the detected communities are model-based, which makes the results hard to explain. In this paper, different from the traditional methodologies, we design two enhanced community structure detection frameworks to incorporate some background information related with the functions of the nodes. It will give new insights into the community discovery problem and improve the interpretability of the results. In the proposed frameworks, there are user-computer interactions, and the results are based on not only the topology of the network, but also the functions of the nodes. The experiments on both the synthetic and the real-world networks have confirmed the effectiveness of the framework.

Keywords: Community Structure Detection, Semi-supervised Learning, Nonnegative Matrix Factorization, Spectral Clustering

1. Introduction

Community structure detection in complex social networks ([1, 2]) is of critical importance for understanding not only the network topology, but also how the network works. In many real applications, the revealed communities often correspond to functional modules of the network, such as pathways in metabolic networks, or a group of people that have a common interest. These functional modules can be considered building blocks of networks.

Furthermore, network dynamics in the networks with community structures can be very different from those without communities.

However, it is very hard to give a general and widely-accepted definition of community structures due to the complexity of real problems, and most of the revealed communities are model-based, which makes the results hard to explain ([?]) for a new dataset, or in other words, the correctness and meanings of the communities can not be confirmed without the background information about the functions of the nodes. Hence if the background information can be effectively incorporated to guide the process of community structure detection, we could get much better results. An elementary study can be found at ref. [3].

In this paper, we will systematically do a research on how to combine different types of prior knowledge with the models of community structure detection, and give two enhanced frameworks for network analysis. Under the proposed frameworks, one can easily incorporate i) the pairwise constraints on whether the nodes in the pair are in the same community structure or not; or ii) the constraints of partial community labels into the adjacency matrix of the network. The experimental results show that the proposed methodologies can significantly improve the detection performance. It will give new insights into the community discovery problem and improve the interpretability of the results.

In summary, the contributions of this paper are three folds: i) We propose a framework that can incorporate the prior information of must-link (ML) & cannot link (CL) type. Note that the framework proposed here is more complete than that in ref. [3]. ii) We propose a framework that can incorporate the prior information of class label type. iii) The experimental results confirm the effectiveness of the proposed framework.

The rest of the paper is organized as follows: Sect. 2 discusses how to incorporate prior information, including both the ML and CL type and the class-label type, to guide the community structure detection process, and briefly introduces nonnegative matrix factorization (NMF) and spectral clustering, which are applied for the detection, Sect. 3 gives the experimental results, and finally Sect. 4 concludes.

2. Enhanced semi-supervised learning for community structure detection

In this section, we discuss our enhanced learning frameworks for community structure detection. Firstly, given an undirected and unweighted simple graph G , we give the definition of the associated symmetric adjacency matrix A as follows:

$$A_{ij} = \begin{cases} 1, & \text{if } i \sim j, \text{ or } i = j, \\ 0, & \text{if } i \not\sim j, \text{ and } i \neq j, \end{cases}$$

where $i \sim j$ means there is an edge between nodes i and j , and $i \not\sim j$ means there is no edge between them.

In many real applications, there is often some prior information available, such as nodes i and j are in the same community, or nodes t and k are not in the same community, or the community label of node p is 1 and the label of node q is 4. We can try to incorporate this information into the community structure detection process to make the result more explainable and clear, which leads to the enhanced learning frameworks. Consequently, we will give the details of the frameworks.

2.1. ML and CL type information

Specifically, if we have known that some pairs of nodes are ML (the two nodes are in the same community), or some pairs of nodes are CL (the two nodes are not in the same community), or both, we can incorporate these pairwise constraints into the adjacency matrix A to get a new matrix $B^{[1]}$ as follows:

$$B_{ij}^{[1]} = \begin{cases} \alpha, & \text{if } i \text{ and } j \text{ are must link (ML)} \\ 0, & \text{if } i \text{ and } j \text{ are cannot link (CL)} \\ A_{ij} & \text{otherwise,} \end{cases} \quad (1)$$

Based on logical inferences, one can get further knowledge of the constraints that i) if nodes i & t are ML, and nodes i & k are ML, then t & k are also ML; ii) if nodes i & t are ML, and nodes i & k are CL, then t & k are also CL, which leads to the following revision of $B^{[1]}$:

$$B_{tk}^{[2]} = \begin{cases} \alpha, & \text{if } i \text{ \& } t \text{ are ML, and } i \text{ \& } k \text{ are ML} \\ 0, & \text{if } i \text{ \& } t \text{ are ML, and } i \text{ \& } k \text{ are CL} \\ B_{ij}^{[1]} & \text{otherwise,} \end{cases} \quad (2)$$

In this paper, we call this logical inferences step as **information-enhanced step**. After this step, the prior knowledge is more fully used, and its effectiveness will be shown in Sect. 3.

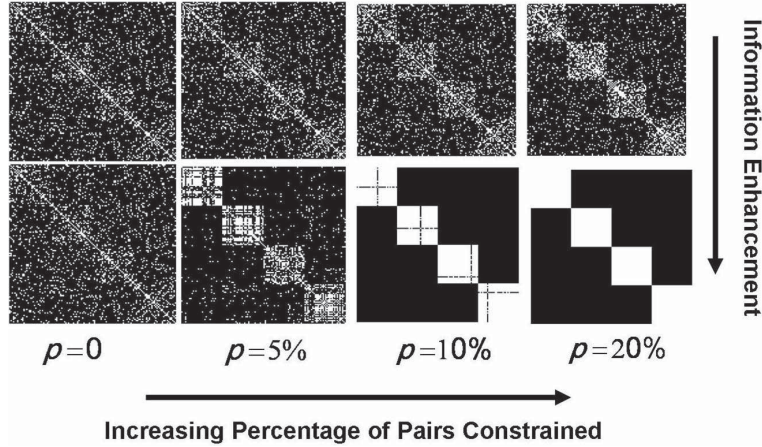


Figure 1: An illustrative example to show the effectiveness of information enhancement. p is the percentage of pairs constrained. For the GN network, there are $128 \times (128 - 1)/2 = 8128$ node pairs available, and $p = 5\%$ means 406 pairs of nodes.

We set α to 2 in this work ([3]).

2.2. An illustrative example

In this subsection, we use a GN network to show the effectiveness of our approach: given an undirected and unweighted “equally sized four groups” network with 128 nodes, we want to detect the community structures in it. The heatmap of the associated adjacency matrix A is shown as the upper left in Fig. 1. Suppose that we have some prior information about the functions of the nodes, and can thus determine a percent of pairs of nodes as must-link (ML) or cannot link (CL). These pieces of information on ML and CL are incorporated into the adjacency matrix A . As expected, the community structures becomes more and more clear as the percentage of pairs constrained rises. However, an surprising observation is the effectiveness of logical inferences, which has dramatically improved the data quality (the second row in Fig. 1).

2.3. Class label type information

In practice, the ML and CL constraints are often obtained from known labels. If we have known a percent of class labels of nodes, we can also

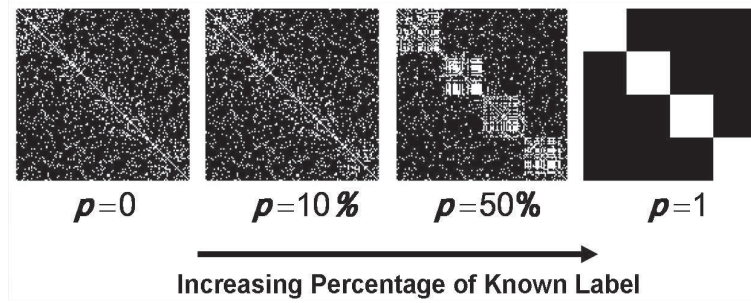


Figure 2: An illustrative example to show the effectiveness of incorporating the information of known labels into the adjacency matrix. p is the percentage of known label. For example, for the GN network, $p = 10\%$ means ($\approx$)13 nodes.

incorporate them into the adjacency matrix A as follows:

$$AA_{ij} = \begin{cases} \alpha, & \text{if } i \text{ and } j \text{ are known to have the same class label} \\ 0, & \text{if } i \text{ and } j \text{ are known to have different class labels} \\ A_{ij} & \text{otherwise,} \end{cases} \quad (3)$$

Note that there is no need to do the information-enhanced step under this case.

2.4. An illustrative example (continued)

Again, we use a GN network to show the effectiveness of incorporating the information of known labels into the adjacency matrix. If we have known the class labels of some nodes, we can then incorporate them into the adjacency matrix A , and as can be observed in Fig. 2, the community structures, again, becomes more and more clear as the percentage of known labels rises.

After incorporating the background information into the adjacency matrix, we can then apply some unsupervised learning models, such as non-negative matrix factorization (NMF) and spectral clustering, on them for community structure detection.

2.5. Nonnegative Matrix Factorization (NMF)

The model of NMF is often formulated as the following nonlinear programming ([4, 5]):

$$\begin{aligned} \min_{W, H} \quad & \|X - WH\|_F^2 \\ \text{s.t.} \quad & W, H \geq 0, \end{aligned}$$

or in other words, given the nonnegative adjacency matrix X of size $n \times n$, where n is the number of the nodes in the network, we try to find two nonnegative matrices, W of size $n \times k$ and H of size $k \times n$, such that: $X \approx WH$. The objective matrix X for NMF can be selected as A , $B^{[1]}$, $B^{[2]}$ or AA . The community structures of the network can be revealed from H : node i is of community k if H_{ki} is the largest element in the i th column of H . The algorithm of multiplicative update rules for NMF can be summarized in Algorithm 1.

Algorithm 1 Nonnegative Matrix Factorization (Least Squares Error)

Input: X , iter % In this paper, the iteration number iter is set to 100.

Output: W, H .

```

1: for  $t = 1$  :iter do
2:    $W_{ik} := W_{ik} \frac{(XH^T)_{ik}}{(WHH^T)_{ik}}$ 
3:    $H_{ik} := H_{ik} \frac{(W^T X)_{ik}}{(W^T W H)_{ik}}$ 
4: end for

```

If a percent of the community labels of nodes is known, we can also use the joint matrix factorization model ([6]). The model can be expressed as:

$$\begin{aligned}
& \min_{W, Q, H} \quad \|X - WH\|_F^2 + \lambda \|L * (Y - QH)\|_F^2 \\
& \text{s.t.} \quad W, Q, H \geq 0,
\end{aligned}$$

where $*$ means element-wise multiplication, Y is the label indicator matrix of size $k \times n$, and Y_{au} is 1 if node u is of community a and 0 otherwise. L is the weight matrix to handle the known labels, and defined as follows:

$$L_{:,j} = \begin{cases} \mathbf{I}_k, & \text{if the label of } j \text{ is known} \\ \mathbf{0}, & \text{if the label of } j \text{ is not known} \end{cases} \quad (4)$$

where $L_{:,j}$ is the j th column of L , and $\mathbf{I}_k = [1, 1, \dots, 1]^T \in \mathbb{R}^k$.

The corresponding multiplicative update rules of W, Q and H are as fol-

lows:

$$\begin{aligned}
W_{ik} &:= W_{ik} \frac{(XH^T)_{ik}}{(WHH^T)_{ik}}; \\
Q_{ik} &:= Q_{ik} \frac{([L.*Y]H^T)_{ik}}{([L.*(QH)]H^T)_{ik}}; \\
H_{ik} &:= H_{ik} \frac{(W^T X + \lambda Q^T [L.*Y])_{ik}}{(W^T W H + \lambda Q^T [L.*(QH)])_{ik}}.
\end{aligned}$$

We set λ to 1 in this paper, and H can be initialized as $s = L.*Y$.

2.6. Spectral Clustering

Spectral clustering is another powerful tool for unsupervised learning. The standard algorithm can be summarized in Algorithm 2 ([7]).

Algorithm 2 Spectral Clustering

Input: $B \in \mathbb{R}^{n \times n}$

Output: Community Label $Y \in \mathbb{R}^{n \times 1}$ of the n nodes

- 1: $L = D^{1/2} B D^{1/2}$, where D is the diagonal matrix with the element $D_{ii} = \sum_j B_{ij}$.
 - 2: Forming the matrix $X = [x_1, x_2, \dots, x_k] \in \mathbb{R}^{n \times k}$, where $x_i, i = 1, 2, \dots, k$ are the top k eigenvectors of L .
 - 3: Normalizing X so that rows of X have the same L_2 norm: $X_{ij} = X_{ij} / (\sum_j X_{ij}^2)^{1/2}$.
 - 4: Clustering rows of X into k clusters by K-means.
 - 5: $Y_i = j$ if the i th row is assigned to cluster j .
-

3. Experimental Results

In this section, we empirically tested the effectiveness of our proposed enhanced semi-supervised learning frameworks for community structure detection. To do this, we applied NMF and spectral clustering with the revised adjacency matrices to several well-studied networks.

3.1. Data Description

Both the synthetic and the real-world networks were used in our experiments. Details are as follows:

- 1) GN (Girvan & Newman, [1]): The GN network, also known as the “four groups” network, has 128 nodes which are divided into four equalized sized non-overlap communities with 32 nodes each. On average, each node has $Z_{in}+Z_{out}=16$ neighbors, or in other words, it randomly connects with Z_{in} nodes in its own community and Z_{out} nodes in other communities. As expected, with an increasing Z_{out} , the community structures will become less and less clear and the problem more challenging. In our experiment, we set Z_{out} to 10 and Z_{in} to 6.
- 2) LFR (Lancichinetti, Fourtunato & Radicchi, [8]): Compared with GN networks, LFR networks are more practical. In LFR networks, both the degree and the community size distributions obey power laws, with exponents γ and β . Each node has a fraction $1 - \mu$ of its neighbors in its own community and a fraction μ in other communities. Here μ is called the mixing parameter.

We set the parameters of the LFR network as follows: the number of nodes was 1000, the average degree of the nodes was 20, the maximum degree was 50, the exponent of degree distribution γ was 2 and that of community size distribution β was 1, and the mixing parameter μ was 0.9. The communities were non-overlapped.

- 3) Football team network ([1]): this dataset is about the network of American football games (not soccer) between 115 college teams during regular season Fall 2000. The edges connect the teams that had games. The teams were divided into 12 conferences, and all teams except few played against the ones in the same conference more frequently than those in other conferences.

3.2. Assess Standards

In this submission, we used the normalized mutual information (NMI, [9]) to assess the effectiveness of our approach. The value can be formulated

as follows:

$$NMI(M_1, M_2) = \frac{\sum_{i=1}^k \sum_{j=1}^k n_{ij} \log \frac{n_{ij}n}{n_i^{(1)} n_j^{(2)}}}{\sqrt{(\sum_{i=1}^k n_i^{(1)} \log \frac{n_i^{(1)}}{n})(\sum_{j=1}^k n_j^{(2)} \log \frac{n_j^{(2)}}{n})}},$$

where M_1 is the ground-truth community label and M_2 is the computed community label, k is the community number, n is the number of nodes, n_{ij} is the number of nodes in the ground-truth community i that are assigned to the computed community j , $n_i^{(1)}$ is the number of nodes in the ground-truth community i and $n_j^{(2)}$ is the number of nodes in the computed community j , $\log$ is the natural logarithm.

In general, the higher the NMI, the better the result.

3.3. Results Analysis

Consequently, we compared the results of NMI obtained by the models with and without prior information available. Noth that, for the classlabel type prior information, we deleted the nodes with known labels when computing NMI to make a fair comparison, or in other words, the results can clearly reflect the effects of the prior information on partitioning the nodes with unknown labels. The results were averages of ten trails and have summarized in Fig. 3 and Fig. 4. From these figures, one can observe that:

- i) For the ML and CL type prior information, 1) the averaged NMI of the semi-supervised learning with and without the information-enhanced step rises with the increasing percentage of ML and CL pairs constrained; 2) the information-enhanced step does significantly increase the detection performance. For example, given 5 percent of pairs constrained on GN networks, the NMI of the non-enhanced semi-supervised NMF (= 53.28%) is forty percent higher than that of the unsupervised one (= 10.50%), and the NMI of the enhanced NMF (= 85.11%) is further improved by more than thirty percent; 3) the spectral clustering is slightly better than NMF.
- ii) For the classlabel type prior information, 1) the averaged NMI of the semi-supervised learning rises with the increasing percentage of known labels; 3) the results of NMF on the revised adjacency matrices AA

are comparable to that of the joint NMF, which means that the joint NMF may not be necessary, and the framework for incorporating the constraints of partial community labels can also be model-independent, just like that for ML & CL; 4) the improvement of NMI may not be as remarkable as that given ML and CL type prior information, especially for the LFR networks, but the workload is smaller than that with ML and CL type constraints (for example, on GN network, 5 percent of pairs constrained means $0.05 \times 128(128 - 1)/2 \approx 406$, and 5 percent of known label means $0.05 \times 128 \approx 6$); 5) NMF is slightly better than spectral clustering for the LFR networks, whose structures are more complex.

3.4. A Case Study: College Football Network


In this subsection, we analyzed the football team network as a case study to show the effectiveness of our semi-supervised learning framework for ML & CL type.

In the football network, there are 115 nodes (teams), and they belong to 12 different conferences. Most of them played against the ones in the same conference more frequently. However, there are also abnormal teams that played more frequently against the ones in other conferences, including the teams 37, 43, 81, 83, 91 (in conference IA Independents), 12, 25, 51, 60, 64, 70, 98 (in conference Sunbelt), 111, 29 and 59. For more details, please refer to the ref. [3].


Combined with our previous work ([3]), we set the community number to 11, and the teams 37, 43, 81, 83, 91 did not have ground-truth conference labels, or in other words, there are 110 labeled teams and $110 \times (110 - 1)/2 = 5995$ team pairs available. Firstly, we randomly selected some pairs in them as prior information: if the two teams were in the same conference, they were must-link (ML), otherwise, they were cannot-link (CL), and then we proceeded to do the information-enhanced step. Finally, we applied NMF on the revised adjacency matrices to give the partitioning results.

Fig. 5 gives the partitioning results of NMF corresponding to different percent of pairs constrained (with and without logical inferences), from which, one can observe that:


- i) When no prior information was given, there were five abnormal teams mis-clustered: teams 29, 60, 64, 98, 111.

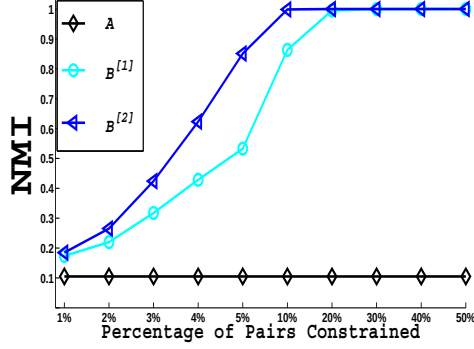


(a) NMF on GN datasets

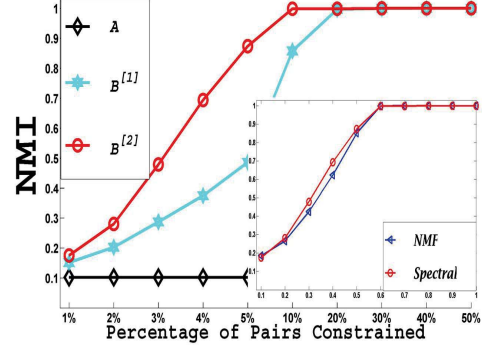

(b) Spectral clustering on GN datasets

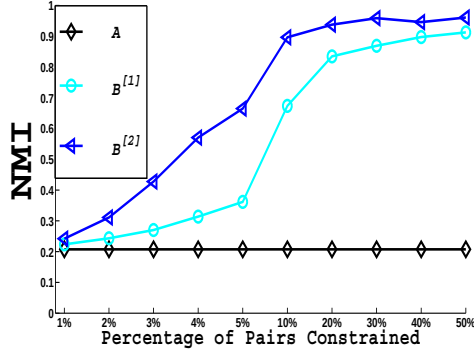


(c) NMF on LFR datasets

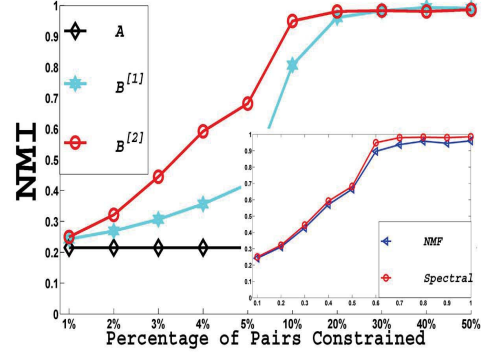


(d) Spectral clustering on LFR datasets


Figure 3: Averaged NMI of NMF and spectral clustering under different percent of node pairs constrained on GN and LFR networks. A denotes NMF (or spectral clustering) on the standard adjacency matrix A , $B^{[1]}$ denotes NMF (or spectral clustering) on the revised adjacency matrix $B^{[1]}$, and $B^{[2]}$ denotes NMF (or spectral clustering) on the revised matrix $B^{[2]}$. The inset compares the NMI results obtained by NMF and spectral clustering on $B^{[2]}$.

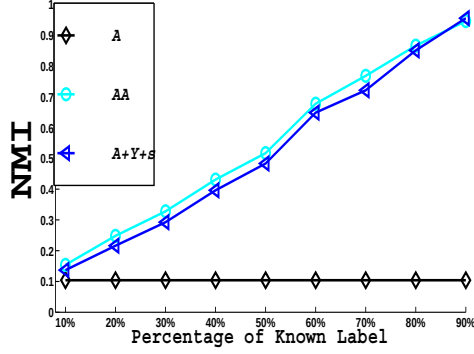


(a) NMF on GN datasets

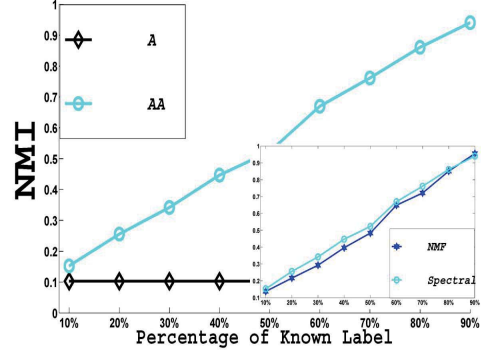

(b) Spectral clustering on GN datasets

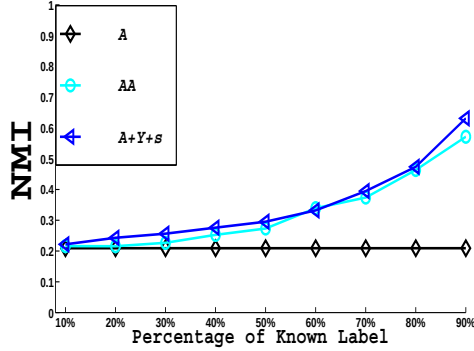

(c) NMF on LFR datasets

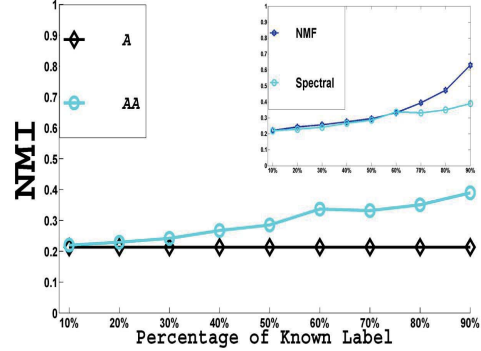

(d) Spectral clustering on LFR datasets

Figure 4: Averaged NMI of NMF and spectral clustering under different percent of node pairs constrained on GN and LFR networks. A denotes NMF (or spectral clustering) on the standard adjacency matrix A , AA denotes NMF (or spectral clustering) on the revised adjacency matrix AA , and $A + Y + s$ denotes joint NMF on the standard A and the community label matrix Y , and H is initialized as $s = L * Y$. The inset compares the NMI results obtained by NMF on $A + Y + s$ and spectral clustering on AA .

- ii) When given 5 percent of pairs constrained, the number of ML and CL pairs of constrained without the information-enhanced step was 300 (5 percent of node pairs available, before logical inferences), and rose to 1130 (18.85 percent, after). There were three abnormal teams mis-clustered: teams 29, 64, 111. An interesting observation here is that the team 64 was mis-clustered into two different conferences (conference 5 and conference 10) under the non-logical-inferences learning and the logical-inferences learning. The reasons are as follows: in this experiment, before the information-enhanced step, there were 7 CL pairs and no ML pairs related with node 64, among which, two were related with the conference 10 while none was related with the conference 5. After the information-enhanced step, there were 18 CL pairs and no ML pairs related with 64, among which, seven were related with the conference 10 and there were still no pairs related with conference 5. The result was thus guided by the enhanced prior information and the team 64 was assigned to conference 5. Note that since the pairs of constrained are selected randomly, another round of the experiment may result in different network partitions. Table 1 gives more details about the ML and CL pairs related with the team 64.
- iii) When given 20 percent of prior knowledge, the number of ML and CL pairs of constrained was 1199 (20% percent, before enhancement), and rose to 5651 (94.26% percent, after). There was only one team 111 mis-clustered into the conference 12 under the non-enhanced learning. After enhancement, teams of the conference 12 were all in the CL set of the team 111, which was very helpful to the community structure detection process. Table 2 gives more details about the ML and CL pairs related with team 111. The team 64 was clustered correctly. Before the information-enhanced step, there were 30 CL pairs and 3 ML pairs related with 64, and after enhancement, there were 102 CL pairs (including almost all the labeled teams that are not in conference 11) and 6 ML pairs (including all the labeled teams in conference 11) related with 64.

Table 1: Must link and cannot link pairs of teams related to team 64 and the teams in conference 10 and 5. The boxed nodes are that included in ML or CL.

Node 64	ML	CL
Non-enhanced	none	21, 44, 57, 59, 72, 85, 107
Enhanced	none	19, 21, 27, 39, 44, 55, 57, 59, 62, 66, 72, 85, 86, 88, 96, 97, 107, 114
Conference 10		18, 21 , 28, 57 , 63, 66 , 71, 77, 88 , 96 , 97 , 114
Conference 5		45, 49, 58, 67, 76, 87, 92, 93, 111, 113

Table 2: Must link and cannot link pairs of teams related to team 111 and the teams in conference 5 and 12. The boxed nodes are that included in ML or CL.

Node 111	ML	CL
Non-enhanced	45, 67	3, 7, 10, 13, 15, 18, 24, 26, 27, 46, 79, 82, 88, 101
Enhanced	45, 67	a total of 95 nodes
Conference 5		45 , 49, 58, 67 , 76, 87, 92, 93, 111, 113
Conference 12		29 , 47 , 50 , 54 , 59 , 68 , 74 , 84 , 89 , 115

In summary, our semi-supervised learning framework did make better use of the prior information and could significantly improve the model performance.

4. Conclusions and Future Works

How to improve the clustering performance using prior information is an important problem in semi-supervised learning society. In this paper, we have proposed two enhanced learning frameworks for community structure detection in social networks. The two frameworks can add either the supervision of must-link (ML) and cannot-link (CL) pairwise constraints or the class-label constraints into the adjacency matrices. For the ML and CL type constraints, we have further done the information-enhanced step based on logical inferences. Note that this step is only feasible under the case of non-overlapped community structures. If otherwise, for example, node i has multiple community labels, the prior information that nodes i and t are ML and nodes i and k are CL may not necessarily result in the fact that nodes t and k are also CL. The numerical results on both the synthetic and real-world networks have confirmed the effectiveness of the proposed frameworks.

Indeed, in practice, it is possible that we have a hybrid of prior information on the class-label and ML & CL, i.e., some prior information is on ML and CL constraints, and some other information is on class-label constraints, and our proposed frameworks can be trivially extended to this case.

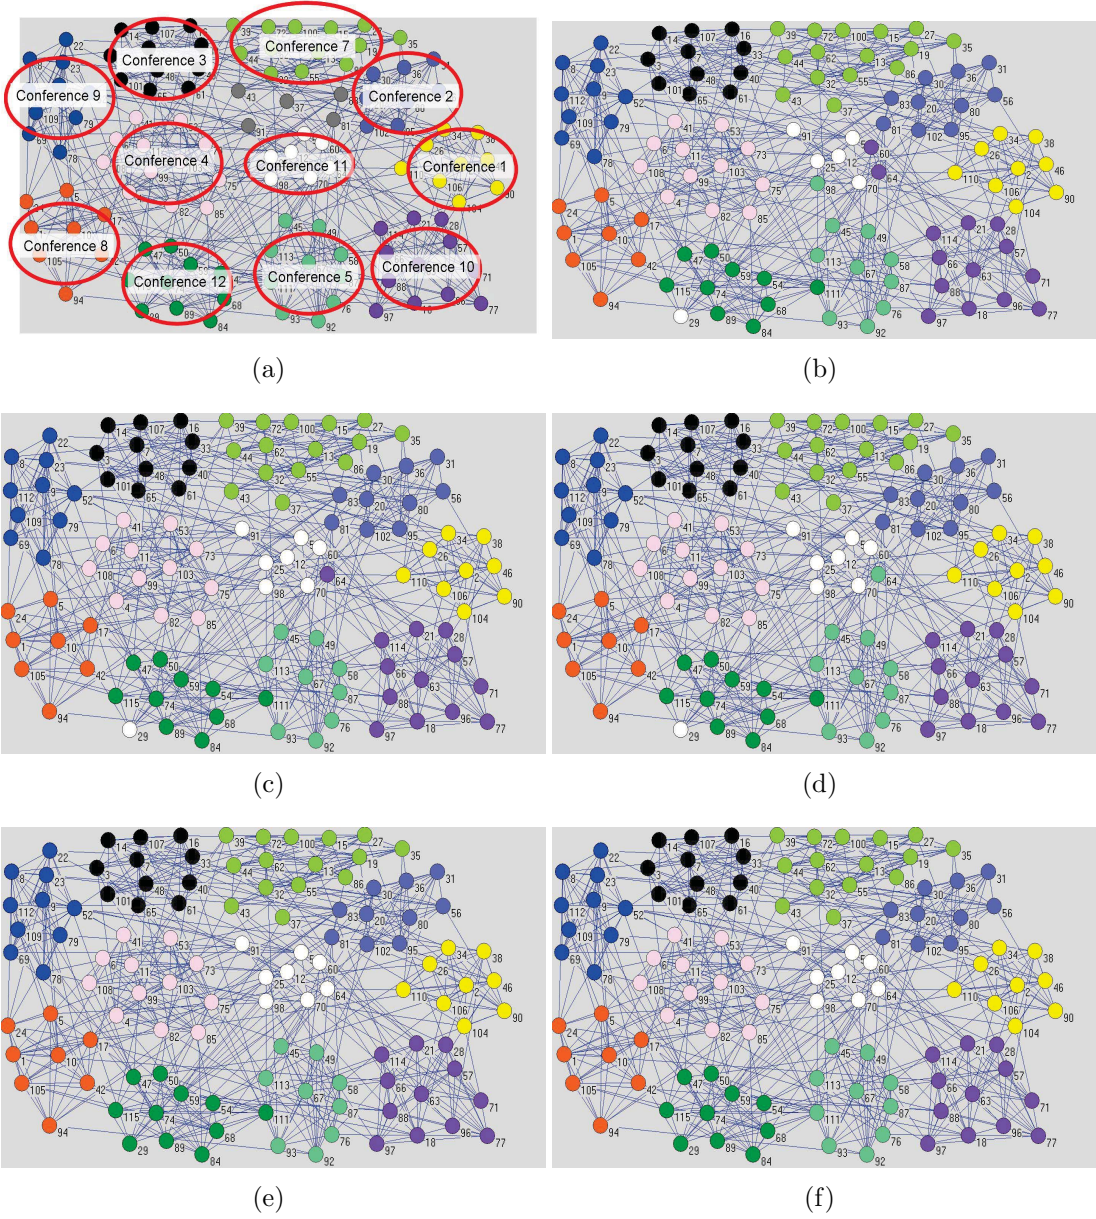


Figure 5: Comparison of the semi-supervised learning results of NMF with and without the information-enhanced step corresponding to different percent of pairs constrained (color online). (a): Real grouping in football dataset. There are 12 conferences of 8-12 teams (nodes) each. Teams in conference 6 are not labeled. (b): Result of NMF without any prior information. (c): Result of NMF given 5 percent of pairs constrained (without the information-enhanced step). (d): Result of NMF given 5 percent of pairs constrained (with). (e): Result of NMF given 20 percent of pairs constrained (without). (f): Result of NMF given 20 percent of pairs constrained (with), and all the labeled teams are corrected clustered.

An interesting problem which is related with our work is the analysis of dynamic networks, such as detecting the communities in a series of time-varying networks. Given the network structure at time t , we can find some conservative relationships between nodes and use them as ML and CL constraints to detect the communities in the new network at time $t + 1$, which is termed by us as online semi-supervised learning.

Acknowledgement

References

References

- [1] M. Girvan, M. E. J. Newman, Community structure in social and biological networks, *Proceedings of the National Academy of Sciences* 99 (12) (2002) 7821–7826.
- [2] M. Newman, M. Girvan, Finding and evaluating community structure in networks, *Physical review E* 69 (2) (2004) 026113.
- [3] Z.-Y. Zhang, Semi-supervised community structure detection in social networks based on matrix de-noising (2012) under review.
- [4] D. D. Lee, H. S. Seung, Learning the parts of objects by non-negative matrix factorization, *Nature* 401 (6755) (1999) 788–791.
- [5] D. D. Lee, H. S. Seung, Algorithms for non-negative matrix factorization, in: *NIPS*, 2000, pp. 556–562.
- [6] H. Lee, J. Yoo, S. Choi, Semi-supervised nonnegative matrix factorization, *Signal Processing Letters, IEEE* 17 (1) (2010) 4–7.
- [7] A. Ng, M. Jordan, Y. Weiss, On spectral clustering: Analysis and an algorithm, *Advances in neural information processing systems* 2 (2002) 849–856.
- [8] A. Lancichinetti, S. Fortunato, F. Radicchi, Benchmark graphs for testing community detection algorithms, *Phys. Rev. E* 78 (2008) 046110.
- [9] A. Strehl, J. Ghosh, Cluster ensembles—a knowledge reuse framework for combining multiple partitions, *Journal of Machine Learning Research* 3 (2002) 583–617.